


## Addendum #2

### Questions and Answers

1. Will the port dispose of the wood piling, timber blocking and steel pile cut-offs?  
Yes
2. Will the contractor furnish the steel pile?  
Yes
3. Is there any detail available for the design of the weld caps for the Pier 1 West piling?  
Weld caps shall be 16" diameter, .50" thickness, flat/stove top style as shown below.



4. What is average embedment?  
26ft. – 28ft.
5. What is the crane weight for Pier 1 West deck?  
650 lbs./sq. ft.
6. Will the port provide as-builts for Pier 1 West?  
Yes (see attached)

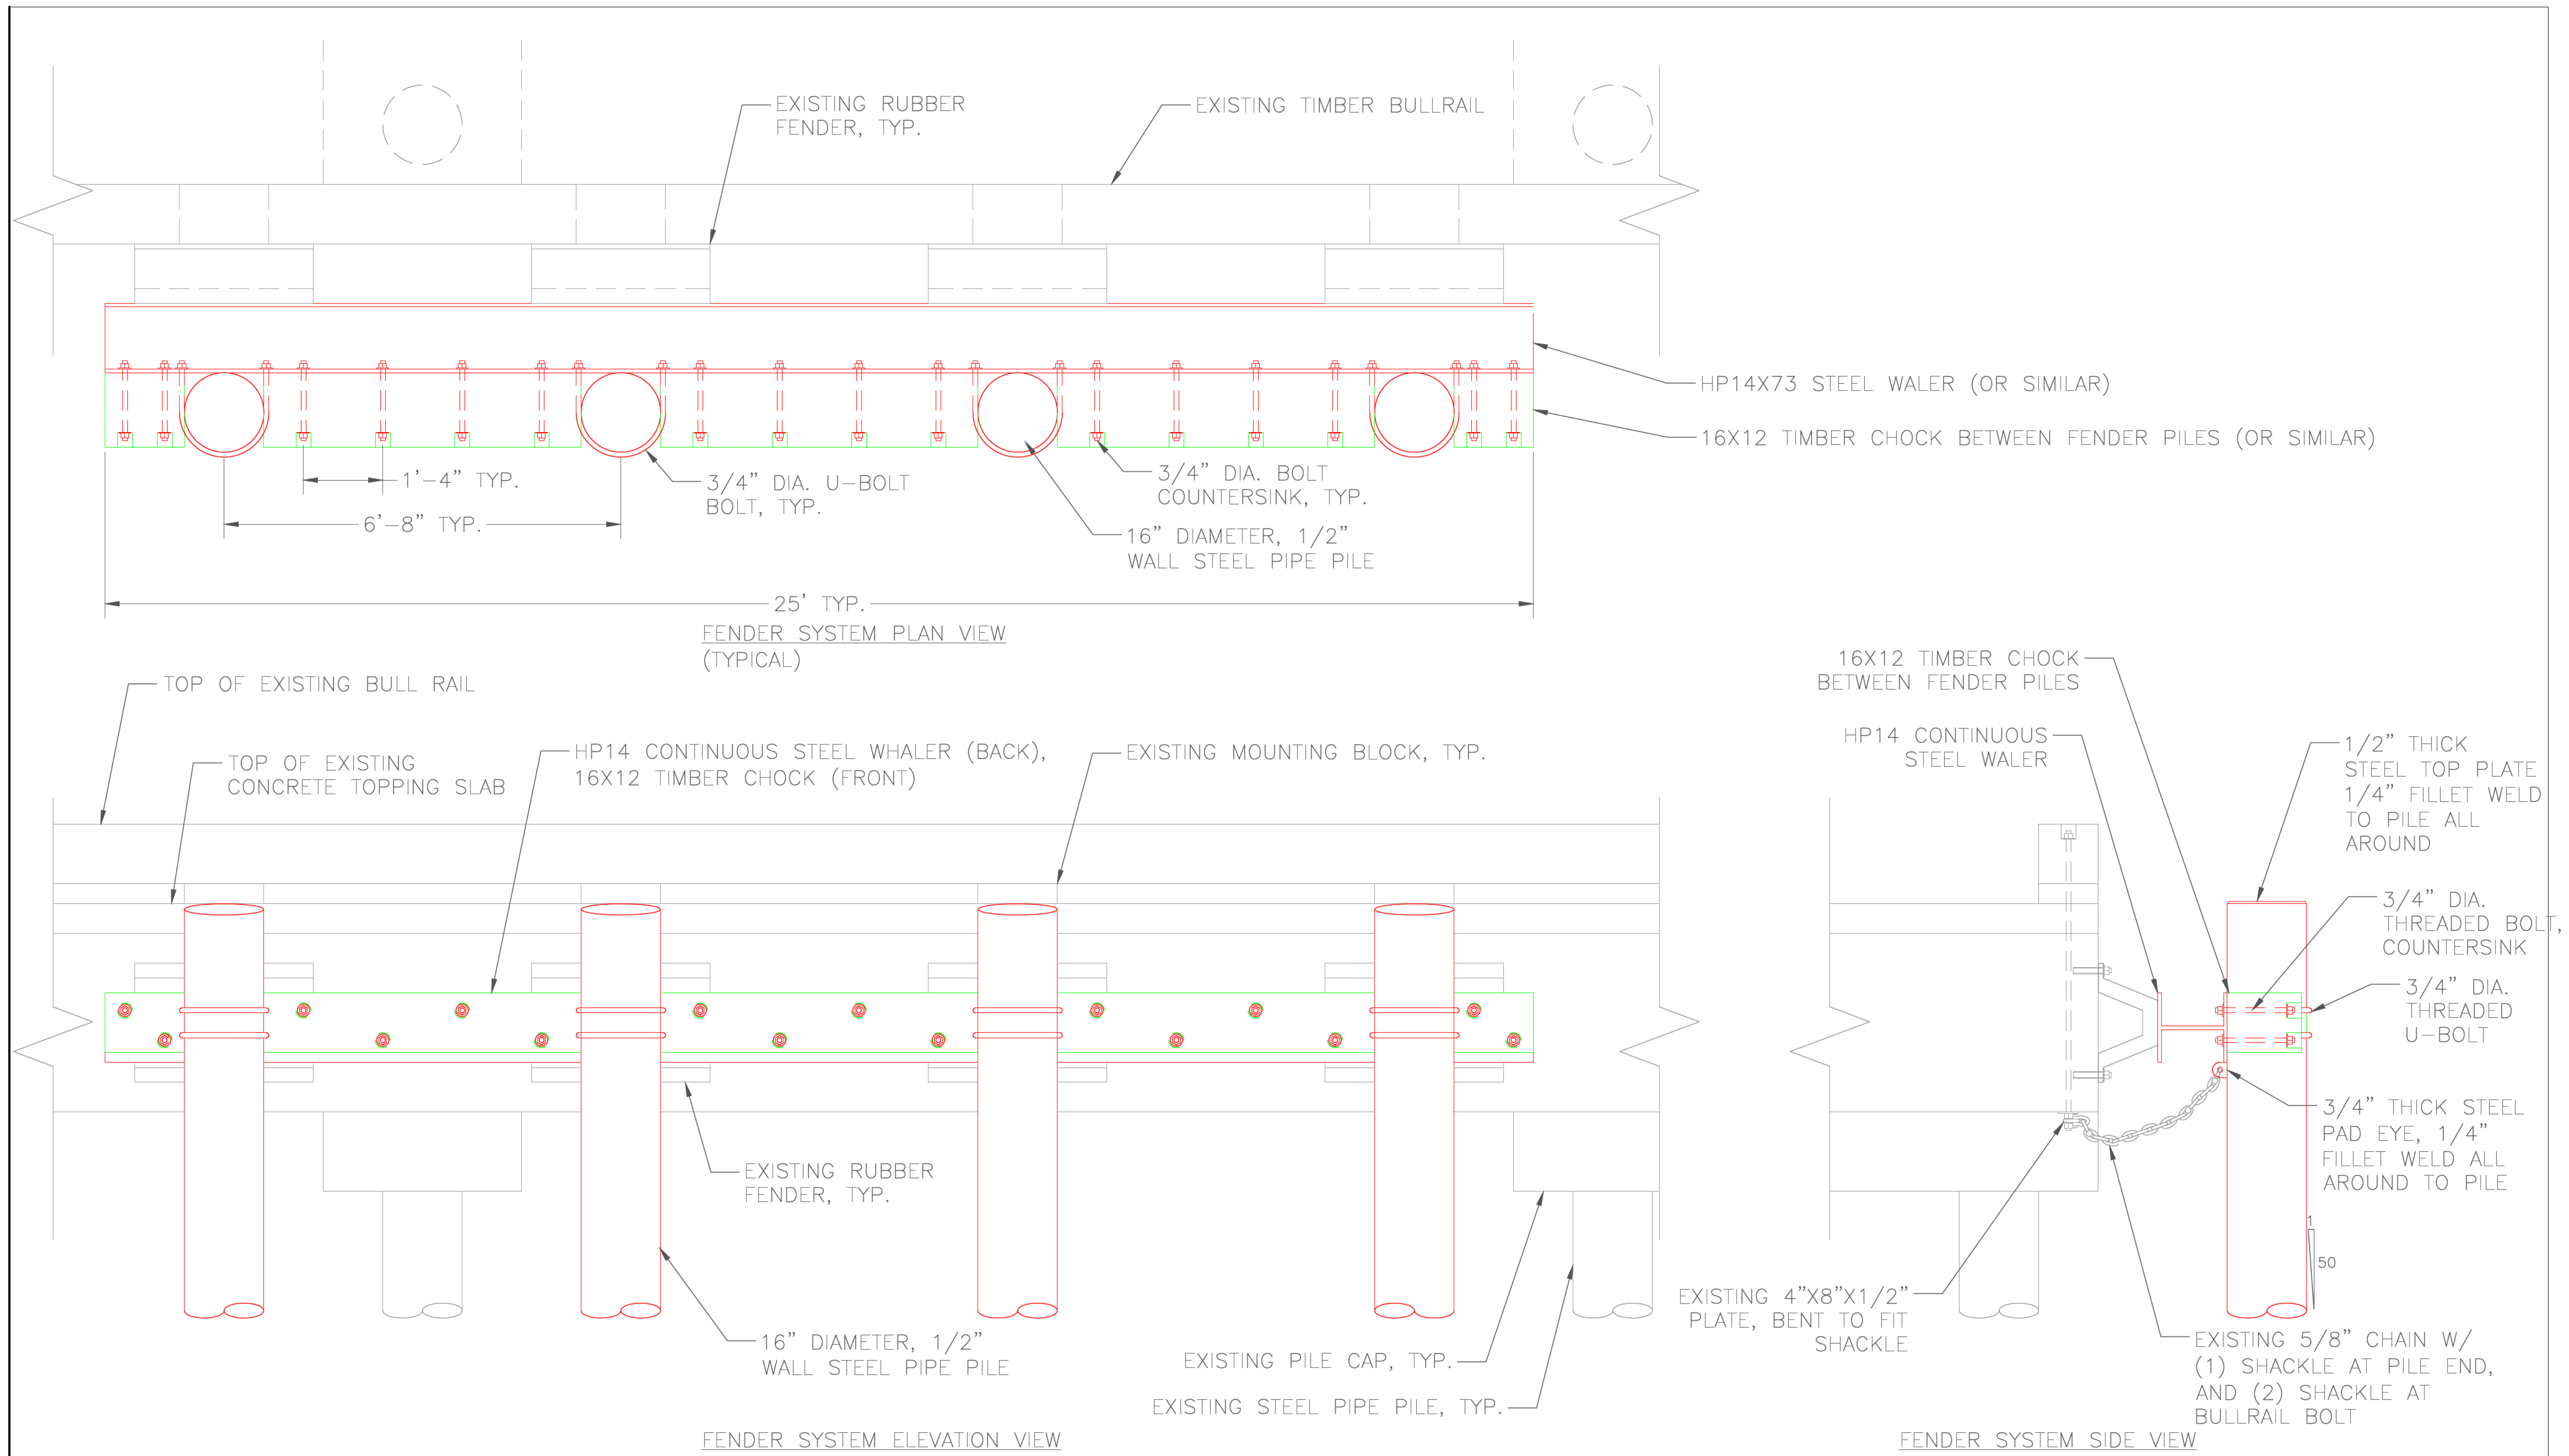

REVISIONS		
Date	Description	Approved



**BERGERSON CONSTRUCTION, INC.**  
 55 PORTWAY ST.  
 ASTORIA, OR 97130

**PORT OF ASTORIA**  
 PIER 1 WEST INTERIM FENDER SYSTEM  
 ASTORIA, OR  
 INTERIM FENDER SYSTEM DETAILS

Designed	8/14/23	File No. PIER 1.DWG
Drawn		
Checked		Sheet 1 of 1
Approved	_____ Date _____	
Title	_____ Job Class _____	